

KEYPAD PROGRAMMING

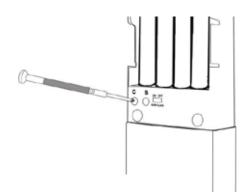


Delete All Codes (Recommended for initial set up):

Press and hold C bu on and wait for a series of confirma on beeps. You will have to hold the C bu on for about 10-15 seconds.

Add a Code

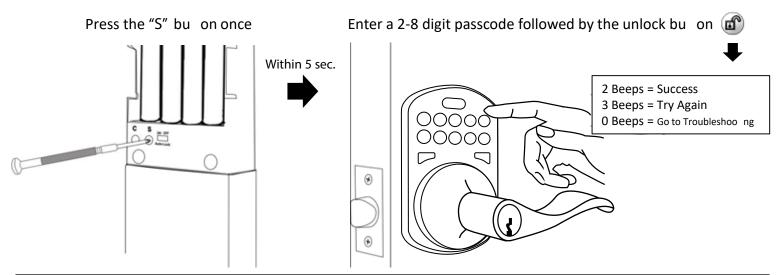

Delete a Code

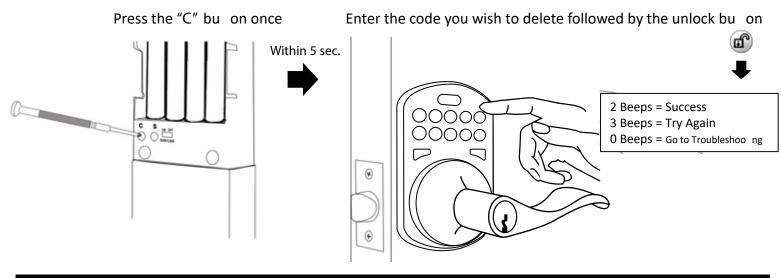

OPERATING INSTRUCTIONS: TO LOCK: Press the LOCK bu on 📵 once TO UNLOCK: Enter code followed by the UNLOCK bu on 🗃 TO LIGHT KEYPAD: Press the "Mi" bu on 🕡 once Auto-Lock Switch: ON (Locks automa cally a er 10 sec.)

TROUBLESHOOTING

Low Batteries (Most Common Issue):

If the lock produces a longer set of rapid beeps and either locks or does not lock the door, you have low ba eries. To avoid any difficules during set up, make sure you are using brand new AA alkaline baeries. Using a baery tester is not recommended.

Loose Keypad Connection:

If not connected securely, the keypad wire harness connec on may come loose and cause some of the numbers to operate inconsistently. To confirm your door lock issue is not being caused by a loose keypad connec on, press every number on the keypad and confirm every bu on beeps when pressed.

If some of the numbers are not beeping, remove the back module (part B) and inspect the wires for any pinches or tears. Make sure to check the wires coming from the keypad as well. Disconnect the wire harness and make sure the pins in the male connect on are not bent out of alignment. Reconnect the wires and confirm every bu on on the keypad beeps when pressed.

If you are so II having keypad issues a per following our troubleshooding guide, call us for a replacement under warranty.

Function Test:

If a passcode has not been successfully programmed, the lock will not operate using the keypad. Lets check if a passcode has been successfully programmed in the memory:

- 1. Unlock the knob and open the door. Make sure you keep the door open while troubleshoo ng.
- 2. Press the LOCK bu on on the keypad 1 me and listen to the beeps:
- If the lock beeps 3 mes and does not lock, it does not have a passcode set in its memory. Refer to the programming page for informa on on adding a passcode.
- If the lock produces a longer set of rapid beeps and either locks or does not lock the door, you have low ba eries. Replace the ba eries with a set of 4 premium "AA" alkaline ba eries.
- If the lock beeps 2 mes then locks, it has at least 1 passcode stored in its memory and is operang correctly.

If you are unable to get your lock to work please give us a call during business hours.


US Live Tech Support: 1-800-355-0157 M-F 9am - 5pm PST (English & Spanish) Warranty shipments are always shipped promptly.

WARRANTY

MiProducts Corpora on warrants to the original residen all user of this product that it will be free from defects in materials and workmanship, under normal use, for 1 year from the date of purchase. User must provide a copy of original purchase receipt. This warranty does not cover abuse or misused products or products used in commercial applica ons. All mechanical components carry a limited warranty, for a period of 25 years from the date of purchase. The finish of the exterior of this lock carries a limited warranty of the life me of the unit against deteriora on due to normal weather condi ons. This warranty does not apply to locks that have been improperly installed, modified, put to a use other than designed, or subjected to acts of God (such as floods, lightning, earthquakes, etc.) This warranty is limited to repairing or replacing of this lock only at MiProducts Corpora on's sole discre on. MiProducts Corpora on will NOT be liable for the cost of installing, removing, nor reinstalling this product, nor direct, indirect, or consequen al damages to persons or property resul ng from the use of this product. This warranty only covers the cost of replacement parts, it does not cover shipping & handling fees.

To implement this warranty please give us a call during business hours at 1-800-355-0157, or visit www.milocks.com.


Model ZWL

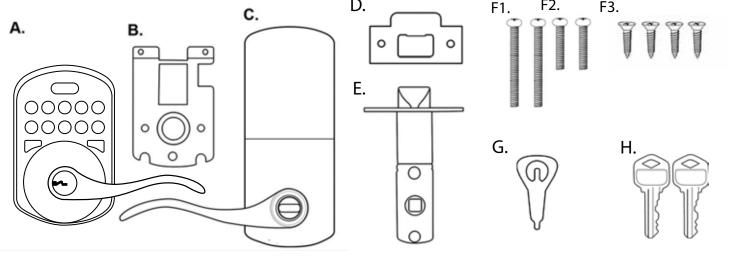

GENERAL WARNINGS & CAUTIONS:

The back module (part C.) needs to be protected from the weather.

Tools Required (not included):





Auto-Lock Switch on Part C.:

On the back module (part C), there is a switch labeled "On-Off" which controls the auto-lock func on.

On = Automa c lock a er 10 seconds. (shortens ba ery life up to 50%) Off = Does not automa cally lock.

For assistance with assembly or installa on, parts and customer service, call: 1-800-355-0157 (English & Spanish) 9am – 5pm PST Mon. – Fri. North America


Battery Precautions

- Do not mix old with new ba eries.
- Do not use rechargeable ba eries. · Remove ba eries from product when
- storing for extended periods of me. • Do not dispose of ba eries in fire as they may explode. Please follow your local ba ery disposal procedure.
- Do not puncture ba eries. Electrolyte leakage from the ba eries is corrosive and can cause serious harm to the eyes or skin. If swallowed, the electrolyte can
- Do not allow conduc ve materials such as jewelry or metal tools to make contact with the ba eries which may cause a short circuit. With a short circuit, the ba eries and conduc ve material can become extremely hot and cause burns.


Register Your Product

- · Although we hope you never have to deal with a warranty claim during the use of our product, you should submit a product registra on to validate the warranty. This keeps it on record with us so you don't have to save a receipt or record of any kind. Just give us a call and we will take care of you.
- · Register at www.milocks.com


1. Adjust Latch Backset

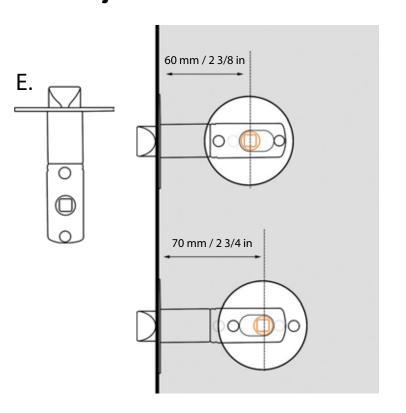


2. Install Door Latch

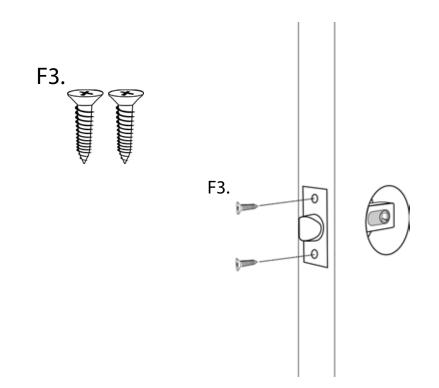


3. Mount Front Module

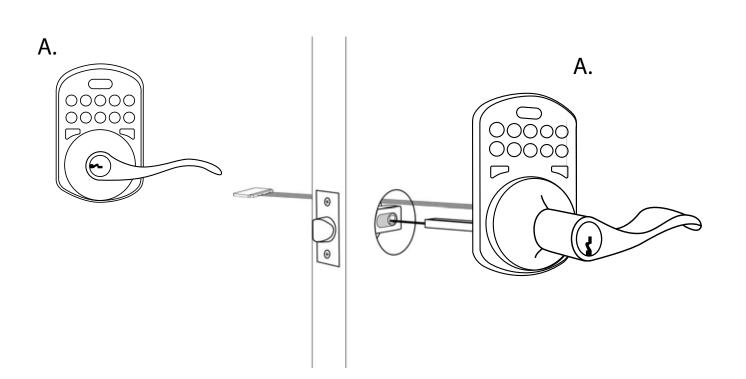

4. Fasten Back Mounting Plate

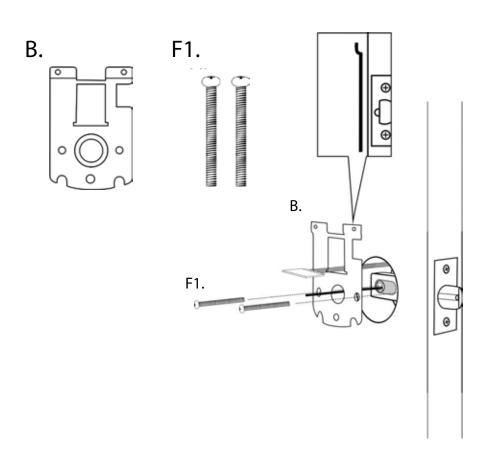

5. Mount & Fasten Back Module

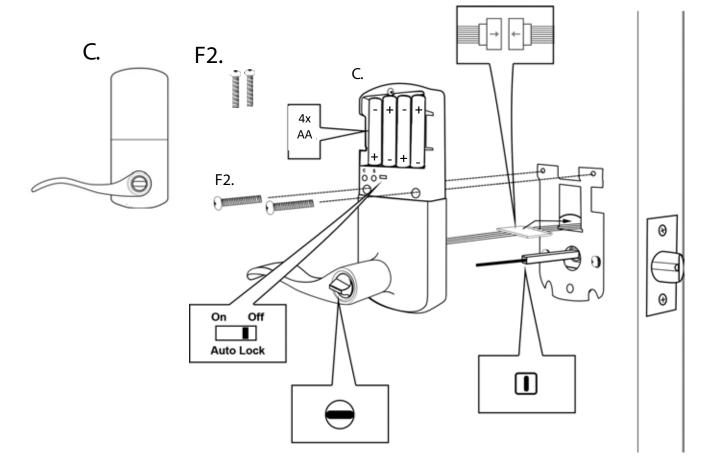

6. Install Battery Cover

